

Software mobile for SERIE PROTEC central units

App for remote management of Hiltron control units **PROTEC4GSM**, **PROTEC8GSM** and **POWER8**, connected through the DXETH module.


The app and the card use a proprietary Cloud connection that allows quick configuration without having to open ports on the router or worry about static IP and ddns.




LOG-IN




HOME SCREEN

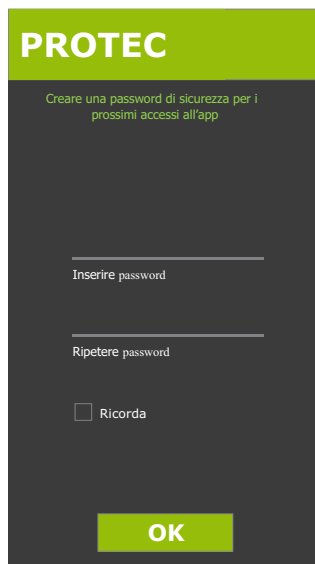

Create a password to protect the app

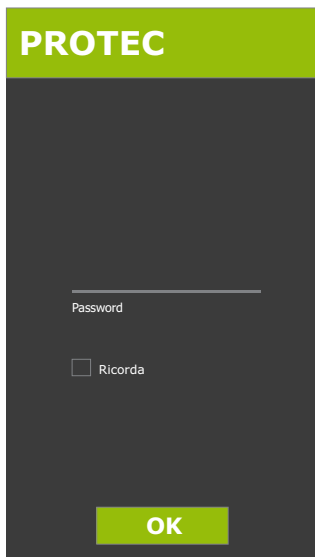

SUBSEQUENT ACCESSES

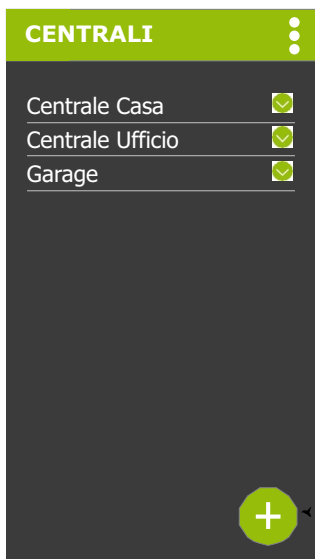

LIST OF CONTROL UNITS

By clicking on a control unit you go to the system management screen

- By clicking on the arrow, the pop-up menu appears
- By clicking on the “**ADD**” button you go to the device addition screen

SETTINGS MENU




Pressing on the three vertical dots, the drop-down menu is displayed

- **SETTINGS**
- **INFO**
- **EXIT**



Selecting "**SETTINGS**" you will access the following screen

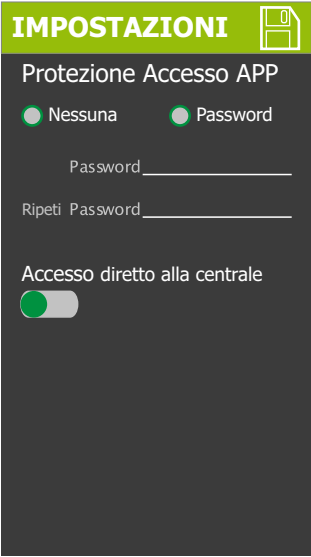

In the **"SETTINGS"** screen you can choose to:

- password protect access
- a direct access to the control panel without a password



Selecting **"INFO"** displays the information relating to the version of the APP

ADD DEVICE

By pressing  on it is possible to add a central to the APP.P.



It is possible to choose between:

- **8 ZONES**
- **4 ZONES**




It is possible to add a central unit with

- CLOUD (P2P)
- IP/DOMAIN

CONNECTION VIA IP / DOMAIN**(if you are connected to the same WI-FI network as the central unit)**

if you are connected to the same WI-FI network as the central unit, just click on the button highlighted on the left, to search for devices.

Alternatively, connect via QR CODE (page 8)

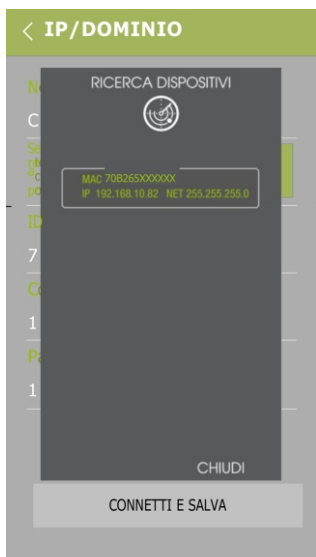

clicking on the device found, the fields will be automatically filled:

IP / DOMAIN (with local IP) and port (previous screen).

CONNECTION WITH CLOUD (P2P)

(if you are not connected to the WI-FI network as the control panel)

< CLOUD (P2P)

Nome
Centrale CASA

Se sei connesso in WI-FI alla stessa rete della centrale clicca il pulsante accanto per avviare la ricerca oppure procedi scannerizzando il QR Code.

ID (MAC Address)
70B265XXXXXX

Codice Utente
1234

Password Cloud
XXXXXXXX

CONNETTI E SALVA

in the **"NAME"** enter the field name of the central unit

in the **"PASSWORD"** field enter the password indicated on the label of the **DXETH** module

After filling in the fields, **save your changes.**

(If they are correct, the system management screen is accessed)

scanning the QR CODE will automatically fill the field of the previous screen relating to the ID (MAC ADDRESS).

< CLOUD (P2P)

Nome
Centrale CASA

Se sei connesso in WI-FI alla stessa rete della centrale clicca il pulsante accanto per avviare la ricerca oppure procedi scannerizzando il QR Code.

ID (MAC Address)
70B265XXXXXX

Codice Utente
1234

Password Cloud
XXXXXXXX

CONNETTI E SALVA



SYSTEM MANAGEMENT



**SYSTEM STATUS
INDICATOR**



**TOTAL
ENABLING**



**ENABLING
PARTIAL A**



**ENABLING
PARTIAL B**

**POSSIBILITY TO EDIT
THE NAME OF THE
INPUTS / OUTPUTS**



**STATUS INDICATORS
OF INPUTS AND OUTPUTS
(OUT IN / OUT LAN) CLICKABLE**



RX / TX CONNECTION LED

CONNECTION TYPE INDICATOR



WI FI



DATA
MOBILE
PHONE



IN THE EVENT OF AN ALARM
THE ICON FLASHES

ELECTRICITY NETWORK STATUS INDICATOR





ELECTRICITY
GRID
OK



NO
ELECTRICITY
GRID

GSM STATUS INDICATOR
(INFO ON OPERATOR AND SIGNAL
TAKEN FROM THE CENTRAL UNIT)

INFO ON FIRMWARE
AND MAC ADDRESS / IP OF THE DXETH BOARD

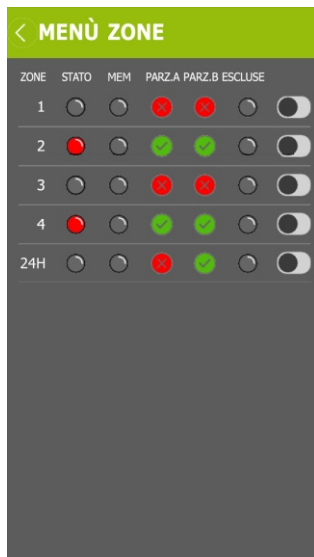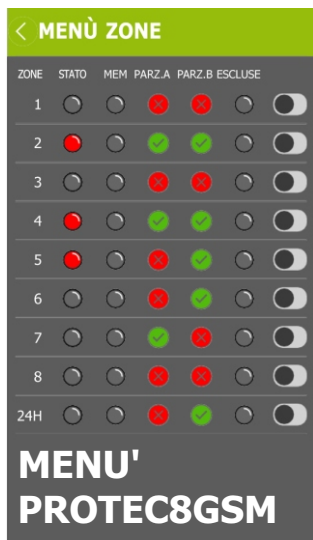

clicking on the zone number, the pop-up menu for viewing and changing the zone name appears.



CONSOLE

