


- Ingresso 24h
- Segnalazione stato impianto a due LED
- Segnalazione a LED programmabile
- Connessione su linea bus MPX 3 fili
- Ingressi programmabili 1
- Grado di sicurezza: 1
- Classe ambientale: 2
- Tensione nominale di alimentazione 12,5Vcc $\pm 10\%$
- Assorbimento massimo 25mA (su +12,5V)
- Livelli sensibilità 8
(da 50mS a 225mS con step di 25mS)
- Uscite relè a scambio programmabili 1
- Dimensioni (LxAxP): 19x33x13mm
- Conforme alla norma CEI EN 50131-1



Installazione


Centrale Serie XM

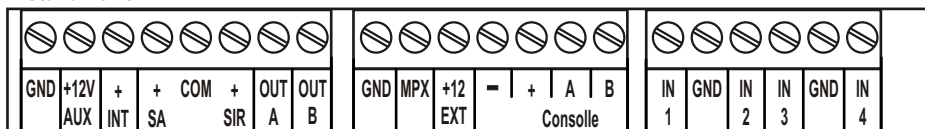

Blu: MPX

Nero: GND

Rosso: +12V EXT

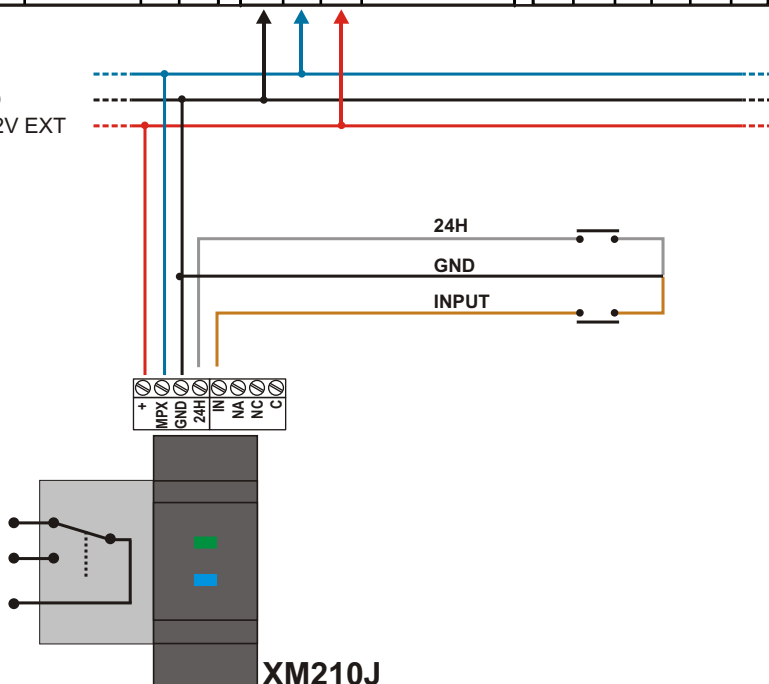

XM210J

La seguente tabella illustra quali sono le funzionalità principali del Tipo11 (T11)

PARAMETRI	
01	ABILITAZIONE
02	DESCRIZIONE
03	SERIALE
04	STATO MPX
05	ERRORE LINK MPX
06	TAMPER / INPUT 24H
07	POLAR. NA/NC
08	TIPO LOG/BIL
09	MANOM. LINEA
10	
11	SENSIBILITA' DA 1 A 8
12	NUM. IMPULSI DA 1 A 4
13	NUM. IMPULSI DA 1 A 8
14	FUNZIONAM. LED
15	IMPIANTO
16	AREA
17	FUNZIONE
18	IMPIANTO COMANDO
19	MODO COMANDO
20	LIVELLO COMANDO
21	
22	GONG IMM.
23	GONG RIT
24	USCITA INVERSA
25	TIPO USCITA
26	TIMER IMP. (ST/EV)
27	USCITA SU BAD MPX
28	LED
29	USCITA LOGICA
30	MESS. COMUN. DIGIT.
31	ECHO USCITA

FUNZIONE	
00	NESSUNA
01	DISINSERIMENTO
02	INSERIMENTO
03	INSER. / DISINSER.
04	INSERIM. SILENZIOSO
05	INSER. SIL. / DISINS
06	STOP ANTIRAPINA
07	STOP ALLARME
08	ZONA IMMEDIATA
09	ZONA RITARDATA
10	24

TIPO USCITA	
00	NORMALE
01	INTERMITTENTE
02	IMPULSO 250mS
03	IMPULSO 500mS
04	IMPULSO 1 Sec
05	IMPULSO 2 Sec
06	IMPULSO 5 Sec
07	IMPULSO 10 Sec
08	IMPULSO 30 Sec
09	IMPULSO 1 Min
10	IMPULSO 5 Min
11	IMPULSO 15 Min
12	IMPULSO 30 Min
13	IMPULSO 60 Min

USCITA SU BAD-MPX	
1	INVARIATO
2	ON IMMEDIATO
3	ON RITARDO 10 sec
4	ON RITARDO 1 min
5	OFF IMMEDIATO
6	OFF RITARDO 10 sec
7	OFF RITARDO 1 min


LED SU IN/OUT	
00	SPENTO
01	STATO IMPIANTO 1
02	STATO IMPIANTO 2
03	STATO IMPIANTO 3
04	STATO IMPIANTO 4
05	ACCESO
06	ACCESO SU ON
07	ACCESO SU OFF
08	LAMPEGGIANTE
09	LAMP. SU ON
10	LAMP. SU OFF

- 24h input
- Visualization system status by 2 LEDs
- Programmable LED signaling
- Connection on MPX bus line 3 wires
- Programmable inputs 1
- Safety degree: 1
- Ambiantal class: 2
- Power supply voltage 12,5Vdc $\pm 10\%$
- Max current consumption 25mA (on +12,5V)
- Selectable levels 8
(8 (from 50mS to 225mS with step of 25mS)
- Programmable relay outputs 1
- Dimensioni (WxHxD): 19x33x13mm
- Complying with norms CEI EN 50131-1




Installation

Serie XM central unit

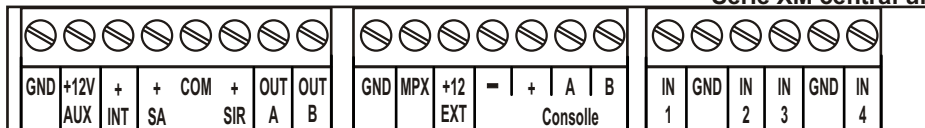

Blue: MPX
Black: GND
Red: +12V EXT

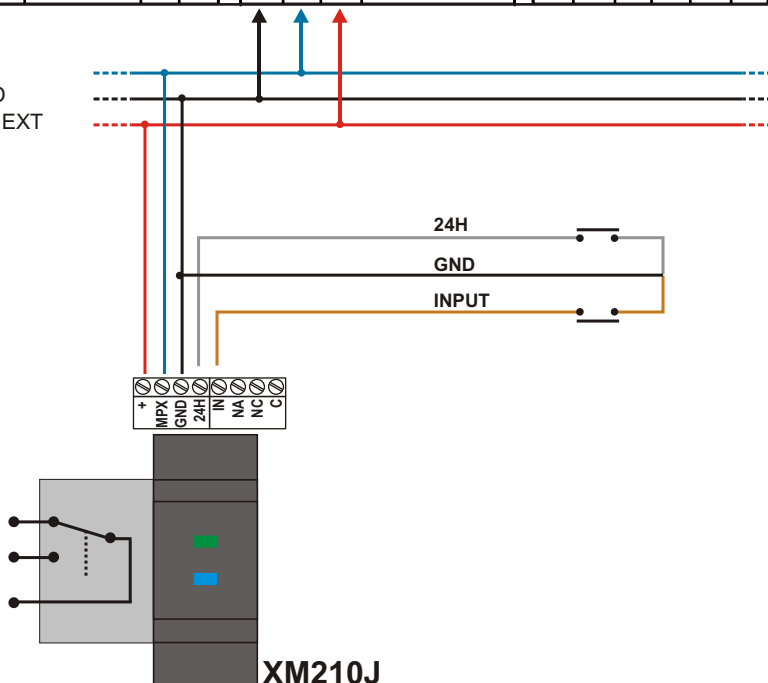

XM210J

The following table shows what are the major features of Type05 (T05)

PARAMETERS	
01	ENABLING
02	DESCRIPTION
03	SERIAL
04	MPX STATUS
05	MPX LINK ALARM
06	TAMPER / INPUT 24h
07	NA/NC POLARITY
08	BALANCED LOGIC
09	BANCED LINE
10	
11	SENSITIVITY
12	NUMBER OF IR PULSES
13	NUMBER OF PULSES
14	LED FUNCTION
15	SYSTEM
16	AREA
17	FUNCTION
18	SYSTEM COMMAND
19	COMMAND MODE
20	COMMAND LEVEL
21	
22	INSTANT GONG
23	DELAYED GONG
24	INVERSION COMMAND
25	OUTPUT TYPE
26	PULSE START
27	BAD MPX OUTPUT
28	LED
29	LOGICAL OUTPUT
30	COMM. MESS. DIGIT.
31	ECHO OUTPUT

FUNCTION	
00	NONE
01	DISCONNECTION
02	CONNECTION
03	CONN./DISCONN.
04	SILENT CONNECTION
05	SIL. CONN./DISCONN.
06	ANTI-THEFT STOP
07	ALARM STOP
08	IMMEDIATE ZONE
09	DELAYED ZONE
10	24H

OUTPUT TYPE	
00	NORMALLY
01	INTERMITTENT
02	IMPULSE 250mS
03	IMPULSE 500mS
04	IMPULSE 1 Sec
05	IMPULSE 2 Sec
06	IMPULSE 5 Sec
07	IMPULSE 10 Sec
08	IMPULSE 30 Sec
09	IMPULSE 1 Min
10	IMPULSE 5 Min
11	IMPULSE 15 Min
12	IMPULSE 30 Min
13	IMPULSE 60 Min

OUTPUT ON BAD MPX	
1	INVARIED
2	ON IMMEDIATE
3	ON DELAY 10 sec
4	ON DELAY 1 min
5	OFF IMMEDIATE
6	OFF DELAY 10 sec
7	OFF DELAY 1 min

LED IN/OUT	
00	OFF
01	SYSTEM STETUS 1
02	SYSTEM STATUS 2
03	SYSTEM STATUS 3
04	SYSTEM STATUS 4
05	ON
06	ON WHEN ON
07	ON WHEN OFF
08	FLASHING
09	FLASH WHEN ON
10	FLASH WHEN OFF