



- Modules make the device with great expansibility
- Anodized front aluminum panel; IK07
- Supports voice and video communication
- 2 MP high definition fisheye camera with 160° view range
- Access control function; controls two locks
- Compatible with 2-wire interface and RJ45 interface
- Surface mount and flush mount
- IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended.)

# VIS2PAG

## Modular Outdoor Station

### Technical Specification

#### System

Main Processor Embedded MCU processor

#### Button

Button Type Mechanical button

#### Port

Power Output Port 5V DC (Provide power for other modules)

#### Regular

Power Supply Mode 5V DC (Provided with power by other modules)

Color Silver

Dimensions 100mm×49.90mm  
×30.50mm  
(3.94"×1.96"×1.20")

Protection Grade IK07; IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)


Operating Temperature -20°C to +60°C (-4°F to +140°F)

Operating Humidity 10%RH–90%RH

Power Consumption 1W

Appearance Color Silver

### Dimension

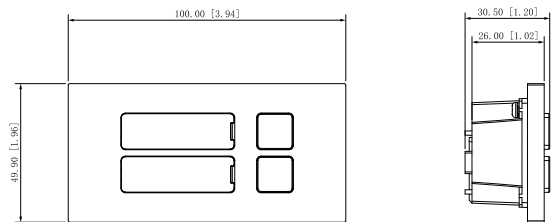

#### HILTRON LAND SRL

Strada provinciale di Caserta, 218 - 80144 Napoli

Tel: (+39)081 185 39 000 Fax: (+39)081 185 39 016

[www.hiltronsecurty.it](http://www.hiltronsecurty.it)