

FEATURES


- Bus line connection 3 wires
- Nominal supply voltage 12Vcc $\pm 10\%$
- Maximum absorption 35mA
- Degree of security 1
- Environmental class 2
- Dimensions (L) 18mm
- Dimensions (H) 32mm
- Dimensions (P) 30mm



Serie XM central unit



Red: +12V EXT
 Blue: MPX
 Black: GND

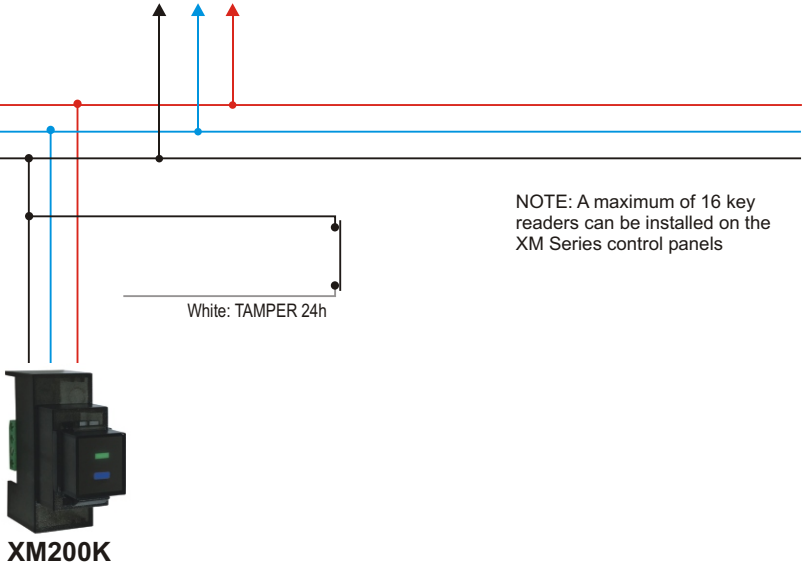

NOTE: A maximum of 16 key readers can be installed on the XM Series control panels

The following table illustrates which are the main functions of Type08 (T08)

PARAMETERS	
01	ENABLING
02	DESCRIPTION
03	SERIAL
04	STATUS MPX
05	ERROR LINK MPX
06	TAMPER / INPUT 24H
07	POLAR. NA/NC
08	TYPELOG/BAL
09	MANIP . LINE
10	
11	SENSIBILITY 1 TO 8
12	NUM. IMPULS 1 TO 4
13	NUM. IMPULS 1 TO 8
14	FUNCTION . LED
15	INSTALLATION
16	AREA
17	FUNCTION
18	COMMAND INSTALLAT.
19	COMMANDE MODE
20	COMMANDE LEVEL
21	
22	GONG IM .
23	GONG RIT
24	INVERS. COMMANDE
25	OUTPUT TYPE
26	START IMPULSE (ST/EV)
27	OUTPUT ON BAD MPX
28	LED
29	LOGIC OUTPUT
30	MES. COMMON. DIGIT.
31	ECHO OUTPUT

FUNCTION	
00	NO ONE
01	DISCONNECTION
02	CONNECTION
03	CONN. / DISCONN.
04	CONN. SILENT
05	CONN. SIL. / DISC .
06	
07	STOP ALARM
08	ZONE IMMEDIATE
09	ZONE DELAYED
10	24H