



- 1/2.7" 5Megapixel progressive scan CMOS
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- 20 fps@2592 × 1944, 50/60 fps@1080P(1920 × 1080)
- WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- 2.7 mm–13.5 mm motorized lens
- 2/1 Alarm in/out, 1/1 audio in/out
- Max. IR LEDs Length 50 m
- Micro SD memory, IP67, IK10

THC5MIPBAI

5MP IR Vari-focal Bullet AI Network Camera



Functions

Face Detection

Face Detection technology can detect the face in the image. With deep learning algorithm, the technology supports detecting, tracking, capturing and selecting the best face image, and then outputs face snapshot.

Face Attributes

With deep learning algorithm, the network camera can recognize face attributes, such as gender, age, expression, glasses, mouth mask, and beard.

Perimeter Protection

With deep learning algorithm, Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, fast moving, parking detection, loitering detection and gathering detection) are largely reduced.

People Counting

With deep learning algorithm, People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/daily reports to meet your requirements.

ePoE

ePoE technology provides a new way to accomplish long distance transmission between IP camera and network switch. It allows more flexible surveillance system design, improves reliability and saves construction and wiring cost.

Protection (IP67, IK10, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.


Technical Specification

Camera	
Image Sensor	1/2.7" 5Megapixel progressive scan CMOS
Effective Pixels	2592 (H) × 1944 (V)
RAM/ROM	1 GB/128 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3 s–1/100000 s
S/N Ratio	>56dB
Minimum Illumination	0.005 Lux@F1.5
IR Distance	Distance up to 50 m (164 ft)
IR On/Off Control	Auto/Manual
IR LEDs	4(IR LED)
Lens	
Lens Type	Motorized vari-focal
Mount Type	Board-in
Focal Length	2.7 mm–13.5 mm
Max. Aperture	F1.5
Angle of View	H: 100°–28°, V: 72°–21° (2592 × 1944) H: 104°–29°, V: 55°–16° (2688 × 1520)

Aperture Type	Auto				
Close Focus Distance	0.8 m (2.62 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	64m(210ft)	26m(85ft)	13m(43ft)	6m(20ft)
	T	212m(696ft)	85m(279ft)	42m(138ft)	21m(69ft)
Pan/Tilt/Rotation					
Pan/Tilt/Rotation Range	Pan: 0 °–360°; Tilt: 0°–90°; Rotation: 0°–360°				
Artificial Intelligence					
Face Detection	Face detection; track; optimization; snapshot; report high quality picture; face enhancement; face exposure; face attribute extract, 6				
	attributes and 8 expressions: Gender, age, glasses, expressions (anger, calm, happiness, sadness, disgust, surprise, confusion and fear),				
	mask, beard; face matting setting: face, single inch photo;three snapshot methods: real-time snapshot, optimization snapshot, quality				
Perimeter Protection	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering				
	detection; people gathering; parking detection				
People Counting	Support the counting of enter number, leave number, and pass number, and displaying and outputting yearly/monthly/daily reports.				
	Support the counting of number in area, and 4 rules configuration. Count number of people or stay time and link alarm.				
	Support queue management, and 4 rules configuration. Count number of people or stay time and link alarm				
General Intelligence					
Event Trigger	Motion detection, Video tampering , Scene changing, Network disconnection , IP address conflict, Illegal Access, Storage anomaly				
General Intelligence	Object Abandoned/Missing				
Heat Map	Yes				
Video					
Compression	H.265,H.264,H.264B,H.264H, MJPEG (only supported by sub stream)				
Smart Codec	Smart H.265+/- Smart H.264+				
Streaming Capability	3 Streams				
Resolution	2592 × 1944/2688 × 1520/2560 × 1440/2304 × 1296/1080P (1920 × 1080)/1.3M (1280 × 960)/720P (1280 × 720)/D1 (704 ×				
	576/704 × 480)/VGA (640 × 480)/CIF (352 × 288/352 × 240)				
Frame Rate	Main Stream: 2592 × 1944 (1 fps–20 fps) 2560 × 1440 (1 fps–25/30 fps) 1920 × 1080 (1 fps–50/60 fps)				
	Sub Stream: D1 (1 fps–20/30 fps) D1 (1 fps–50 fps)				
	Third Stream: 1080P (1 fps–17 fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.264: 32 Kbps–8192 Kbps H.265: 19 Kbps–8192 Kbps				
Day/Night	Auto(ICR)/Color/B/W				
BLC Mode	BLC/HLC/WDR (120 dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off/On (4 Zone, Rectangle)				
Region of Interest	Off/On (4 Zone)				
Electronic Image Stabilization (EIS)	Yes				
Smart Illumination	Yes				
Defog	Yes				
Flip	0°/90°/180°/270°				
Mirror	Off/On				
Privacy Masking	Off/On (4 Area, Rectangle)				
Audio					
Compression	G.711a, G.711Mu, AAC, G.726, G.723N/A				
Alarm					
Alarm Event	No SD card;SD card full;SD card error;network disconnection;IP conflict;illegal access;motion detection;video tampering;Defocus Detection;scene				
	changing;intrusion;tripwire;aban doned object;missing object;fast moving;parking detection;loitering detection;people gathering;audio				
	detection;people counting;face detection;voltage detection;People counting in area;Stay alarm;People No. exception detection;Queue Management				

Network	
Network	RJ-45 (10/100 Base-T)
SDK and API	Yes
Protocol	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP ;RTMP;SMTP;FTP;SFTP;DHCP;DNS;DDNS;QoS;UPnP ;NTP;Multicast;ICMP;IGMP;N-FS;PPPoE;802.1x;SNMP
Interoperability	ONVIF (Profile S/Profile G/Profile T), CGI, Milstone, Genetec, P2P
User/Host	20 Users
Storage	NAS;FTP;SFTP;Dahua Cloud Micro SD card 256 GB
Browser	IE (versions newer than IE8), Chrome, Firefox, Safari (versions newer than Safari 12)
Management Software	Smart PSS, DSS, DMSS
Mobile Phone	iOS, Android
Certifications	
Certifications	CE-LVD: EN62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07
Interface	
Audio Interface	1/1 channel In/Out
Alarm	2 channel In: 5mA 5V DC 1 channel Out: 300mA 12V DC
Electrical	
Power Supply	DC 12V ($\pm 30\%$), PoE (802.3af)
Power Consumption	<10.9W
Environmental	
Operating Conditions	-30° C to +60° C (-22° F to +140° F) /Less than 95% RH
Storage Conditions	-40° C to +60° C (-40° F to +140° F)
Protection Grade	IP67,IK10
Construction	
Casing	Metal, plastic
Dimensions	273.2 mm \times 95.0 mm \times 95.0 mm (10.76" \times 3.74" \times 3.74")
Net Weight	1.11 kg (2.44 lb)
Gross Weight	1.51 kg (3.33 lb)

Dimension

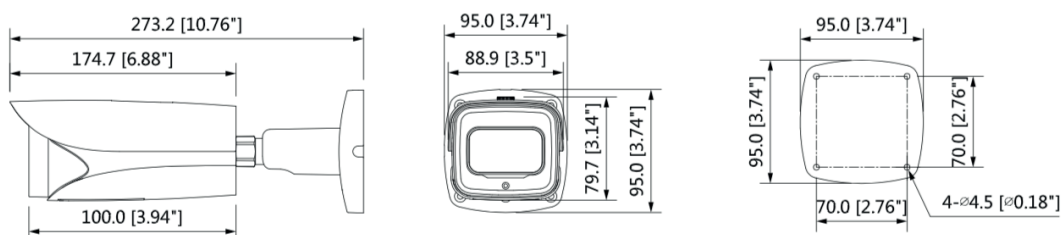

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.it

